


# TW-R30-K9

## HF Tag

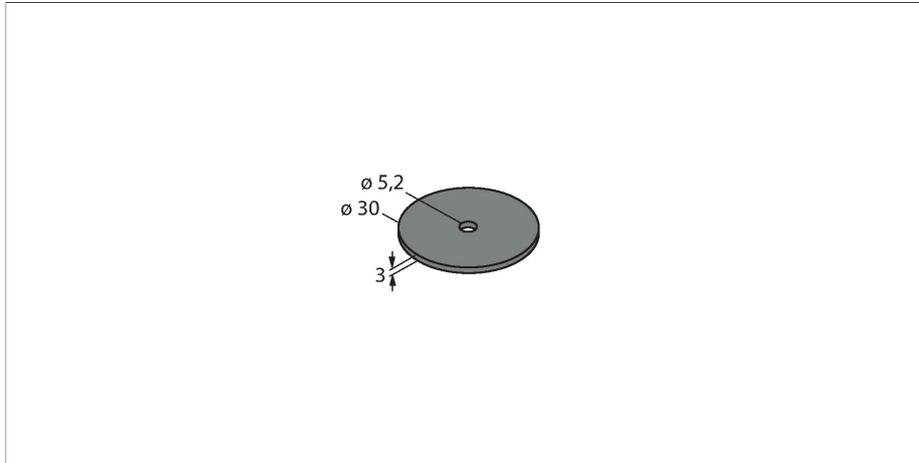

### Technical data

Type	TW-R30-K9
ID	7030565
Remark to product	Not suitable for direct mounting on metal
Data transfer	Inductive coupling
Technology	HF RFID
Operating frequency	13.56 MHz
Radio communication and protocol standards	ISO 15693 NFC Typ 5
Read/Write distance max.	144 mm
Design	Hard tag, R30
Housing material	Plastic, PA6
Active area material	Plastic, PA6, black
Protection class	IP69K
Tightening torque	≤ 6.5 Nm
Packaging unit	1

### Technical data

Type	TW-R30-K9
ID	7030565
Remark to product	Not suitable for direct mounting on metal
Data transfer	Inductive coupling
Technology	HF RFID
Operating frequency	13.56 MHz
Memory type	FRAM
Chip	Fujitsu MB89R112
Memory size	9216 Byte
Memory	Read/Write
Freely usable memory	8192 Byte
Number of read operations	10 <sup>12</sup>

### Features

- FRAM memory 9 kB
- Not for direct mounting on metal

### Functional principle

The HF read/write devices operating at a frequency of 13.56 MHz form a transmission zone the size of which (0...500 mm) varies, depending on the combination of read/write head and tag used.

The read/write distances mentioned here only represent standard values measured under laboratory conditions, free from any influences caused by surrounding materials.

The read/write distances of tags suitable for mounting in/on metal were determined in/on metal.

Attainable distances may vary by up to 30 % due to component tolerances, mounting conditions, ambient conditions and material qualities (especially when mounted in metal). Testing of the application under real operating conditions is therefore essential, especially with on-the-fly reading and writing!

## Technical data

Number of write operations	10 <sup>12</sup>
Typical read time	0.5 ms/Byte
Typical write time	0.5 ms/Byte
Radio communication and protocol standards	ISO 15693 NFC Typ 5
Minimum distance to metal	10 mm
Temperature during read/write access	-40...+85 °C
Temperature outside detection range	-40...+90 °C
Design	Hard tag, R30
Diameter	30 mm +/- 0.5 mm
Internal diameter	5.2 mm +/- 0.3 mm
Housing height	3 mm +/- 0.5 mm
Housing material	Plastic, PA6
Active area material	Plastic, PA6, black
Tightening torque	≤ 6.5 Nm
Protection class	IP69K
Packaging unit	1