


Mounting Accessories

Mounting Kit

BTS-DSU35-Z02

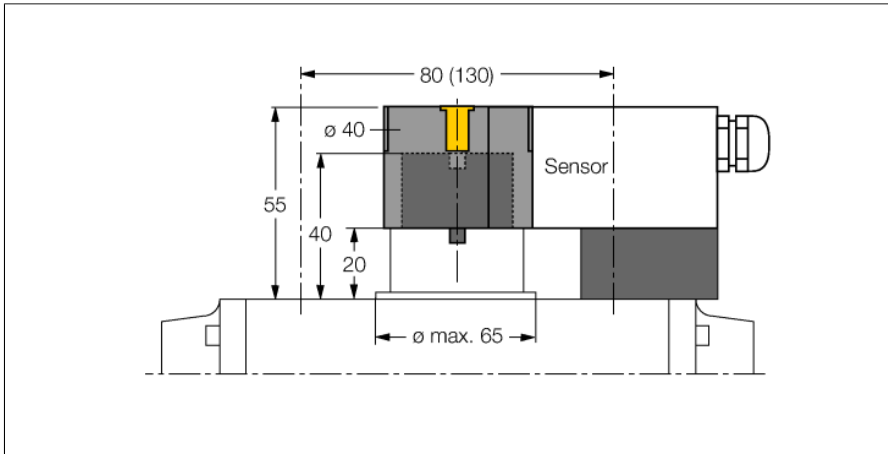

Mounting kit for larger rotary actuators:
 Spacer plate and snap ring \varnothing : max. 65 mm
 Hole pattern on flange surface: 30 × 80 mm
 (30 × 130 mm)
 Connection shaft (shaft peg) height 20 mm / \varnothing
 max. 40 mm
 Included in delivery:
 1 spacer plate \varnothing 20 mm (POM)
 1 spacer ring \varnothing 20 mm (PP-GF30)
 Mounting the spacer plate:
 2 cylinder screws M5 × 35 [DIN 912-A2]
 2 spring washers A5 [DIN 137-A2]
 Mounting the puck with spacer ring:
 1 countersunk screw M6 × 45 [DIN 7991-A2]
 The spacer ring has a 4 × 4 mm cross-shaped
 notch allowing the actuator to be mounted
 offset by 90°, suited for cross-wise mounted
 drives.

Type	BTS-DSU35-Z02
ID	6900230
Design	Accessories for dual sensor, Ni4-DSU35...
Housing material	Plastic, PP-GF30

General description

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

